

LED Mirror Installation Instructions

Brunner "Pill" Mirror


UNILED



MOUNTING AND CONNECTING OUR LED MIRROR

Please ensure you have enough noggin in this area to screw the bracket to the wall securely. The mirror now just hooks over the bracket and clips and hangs securely on the bracket against the wall.

The mirror comes as a sealed unit with a power cable protruding dead centre of the back of the mirror for all round models, so all you require is a 240Vac power feed in the wall, dead centre for round models. Make sure you have a round hole of 30-40mm in diameter where the power feed will sit in the wall. You will then hardwire connect your feed to our cable and tuck the excess cable back into the wall behind the mirror.

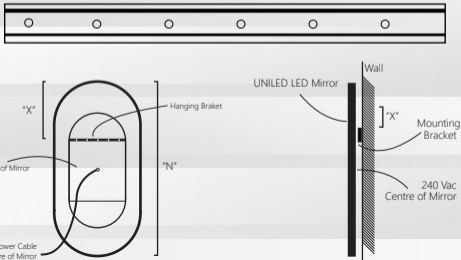

MOUNTING AND CONNECTING OUR LED MIRROR

The hanging bracket is 30mm in height and has screw holes approximately every 75mm apart. The bracket should be mounted at the following heights:

"N" 900X400mm Portrait-Top of Bracket to be mounted **"X"** 190mm Below the Desired Height of the Mirror

"N" 1000X500mm Portrait-Top of Bracket to be mounted **"X"** 230mm Below the Desired Height of the Mirror



The PILL mirrors have an adhesive Velcro at the bottom back side to secure the mirror to the wall. Wipe the wall or tiles behind the mirror thoroughly, remove the tape from the Velcro and press the bottom of the mirror firmly towards the wall.

Please note that a registered electrician must connect the mirror to the 240Vac power feed!

Should you require any further assistance, please email info@uniled.co.nz or call 09 271 6613

SHOWROOMS

Home Ideas Centre - Auckland

165 The Strand, Parnell Auckland

Home Ideas Centre - Wellington

Cnr The Esplanade &, Hutt Road, Petone, Wellington.

Round Mirrors



UNILED

LED MIRRORS,
CABINETS &
VANITIES

Handcrafted in New Zealand